



件 : SU-01-19-A-07-A06H

: 01

: 2018.9.10

1 共 3

## PD80-TO46-FW Series

### Features:

- Low Voltage Operation
- Low Capacitance and High Speed with a PIN Structure
- Low Dark Current
- Excellent Stability

### Applications:

- Digital and Analog Optical Communication
- Optical LAN
- OTDR

### Specifications:

A M :


		M .	M .	
Reverse Voltage	$V_R$	—	20	V
Forward Current	$I_F$	—	10	mA
Max. Optical Input Power	$P_{MAX}$	—	10	mW
Operating Temperature	Top	-40	+85	°C
Storage Temperature	Tstg	-40	+85	°C
Lead Solder Temperature	—	—	260	°C
Lead Solder Time	—	—	10	s

C : ( =25°C )

		C	M .	.	M .		
Active Diameter	D	—	—	80	—	μm	
Bandwidth	BW	Pi=-10dBm, Small signal modulation, $V_R=5V$	—	2.0	—	GHz	
Responsivity	@1310nm	R	$V_R=5V$	0.80	0.9	—	A/W
	@1550nm	R	$V_R=5V$	0.90	0.95	—	A/W
Dark Current	ID	$V_R=5V$	—	0.03	0.16	nA	
Chip Capacitance	$C_{chip}$	$V_R=5V, f=1MHz$	—	0.65	0.8	pF	
Optical Spectrum Response Range	$\lambda$	—	1100	—	1650	nm	
Operating Voltage	V	—	—	-5	—	V	






### Mechanical Dimension and Pin Assignment:

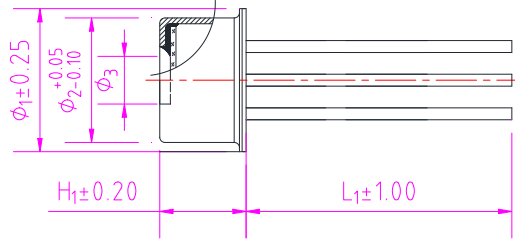

Type A

Type B

Type C



### Standard Product List:

Product name	Φ <sub>1</sub> (mm)	Φ <sub>2</sub> (mm)	Φ <sub>3</sub> (mm)	H <sub>1</sub> (mm)	L <sub>1</sub> (mm)	Received light form
PD80-TO46-FW-A	5.4	4.7	1.8min	3.25	14	Parallel light & Divergent light
PD80-TO46-FW-B	5.4	4.7	1.8min	3.25	14	
PD80-TO46-FW-C	5.4	4.7	1.8min	3.25	14	

- Standard and custom designs to suit your systems.

### Order Information:

D80

<u>Header Type:</u> TO46	<u>Cap Type:</u> FW: Flat Window	<u>Numbers of Pin:</u> 3pin 4pin	<u>Pin Assignment:</u> A: Type A B: Type B C: Type C
-----------------------------	-------------------------------------	--	---



---

件 : SU-01-19-A-07-A06H : 01 : 2018.9.10 3 4 3

:

SAN-U owns the authority for final explanation of all information contained in this document, which is subject to change without notice. All the information was obtained in particular environments; and SAN-U will not be responsible for the performance of the customers' actual operating environments. All information contained is only for the users' reference and shall not be considered as warranted characteristics. SAN-U will not be liable for damages arising directly or indirectly which from any use of the information contained in this document.

---

**C I :**

Address: N501-505 Weiye Bldg., Xiamen Pioneering Park For Overseas Chinese Scholars, Xiamen, Fujian, China

Tel: +86-592-3898601, 3898608, 5318000

Fax: +86-592-5703588

Email: [sales@san-u.com](mailto:sales@san-u.com)

<http://www.san-u.com>