件 : -01-19-A-07-A08: 01: 2018.9.17

1 共 3

## PD300-TO46-BL Series

### Features:

D C  
C-B 1310 ; -B

### Applications:

D

### Specifications:

#### Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max.	Unit
		—	20	
C		—	50	A
	A	—	30	
		-40	+85	°C
		-40	+85	°C
	—	—	260	°C
	—	—	10	

#### Characteristics: (Ta=25°C unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
A D	D	—	—	300	—	
B	B	=-10 B , , =5	400	600		
	@1310	=5	0.8	0.9		A/
	@1550	=5	0.9	0.9		A/
D C	D	=5	—	0.1		A
C C	C	=5 , =1	—	4.0	6.0	
		—	1100	—	1620	

:// . - . : +86-592-3898601 : +86-592-5703588 : @ - .



件 : -01-19-A-07-A08


: 01

: 2018.9.17

2 3

		—	—	-5.0	—	
--	--	---	---	------	---	--


### Mechanical Dimension and Pin Assignment:

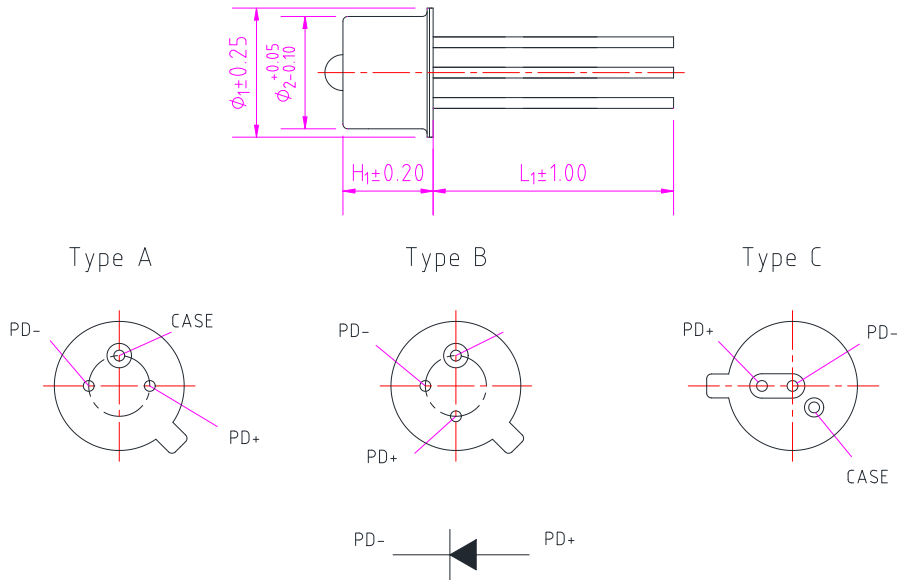

### Standard Product List:

	$\Phi_1$ ( )	$\Phi_2$ ( )	$l_1$ ( )	$l_2$ ( )	
D300- 46-B ( )-A	5.4	4.7	3.75	14	D
D300- 46-B ( )-B	5.4	4.7	3.75	14	
D300- 46-B ( )-C	5.4	4.7	3.75	14	
D300- 46-B ( )-A	5.4	4.7	3.35	14	
D300- 46-B ( )-B	5.4	4.7	3.35	14	
D300- 46-B ( )-C	5.4	4.7	3.35	14	

### Order Information:

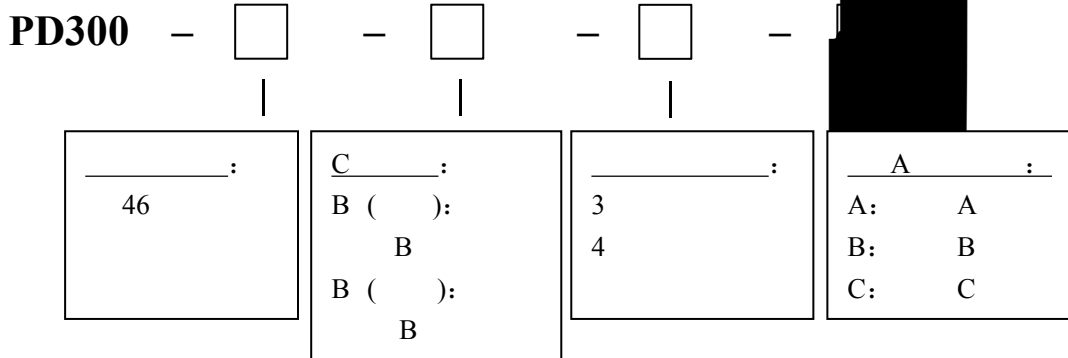



# 厦门三优光电股份有限公司

XIAMEN SAN-U OPTRONICS CO., LTD.


件 -01-19-A-07-A08 : 01 : 2018.9.17 3 共 3

Statement:



. A ;  
. A  
A -

### Information:



01-505 B , C , ,  
, C  
: +86-592-3898601, 3898608, 5318000  
: +86-592-5703588  
: @ - .  
[://](#) - .

